


CLEAR GREASE

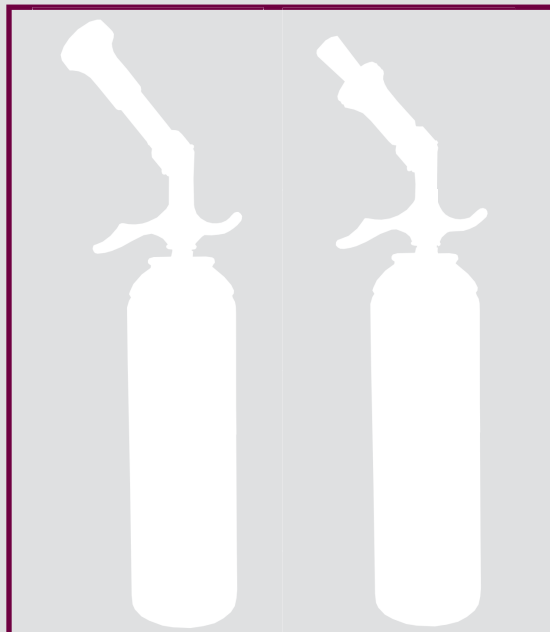

- Approved for the food industry NSF-H1, no. 140162.
- Anti-wear (contains PTFE).
- Anti-corrosion.
- Non-acidic.
- Electrically non-conductive.
- Water resistant.
- Temperature range -20°C to +170°C (peak +220°C)
- Reduces stick-slip and pitting.
- Includes protective cap and brush.

Applications:

Due to its extreme high-quality, the product can be used in the food industry, agricultural machinery, transport, general industry and construction sector. Ideal for:

All types of conductors

Rods

Bearings

Mounting of antennas

High peripheral speeds

Cables

Open and closed systems

Silent blocks

Chains

Power systems

Mounting rubbers

Battery terminals

<u>Art.No.</u>	<u>Product</u>	<u>Content</u>
E100011	CLEAR GREASE PRESS PACK	200 ml

TECHNICAL SPECS

Color:

Composition:

Density:

NLGI grade:

Thermal stability:

Temperature range:

Drop point:

EP performance 4-ball test, load:

White - Transparent

Medicinal oil, thickener, PTFE, adhesive.

ca. 0,90

1-2

Good

-20°C to +170°C (Peak +220°C)

>250°C

3924N

Instructions for use

Apply the holder with the brush before use. Screw off the cap and push back the protective cap to free the brush. Apply the product and spread it with the easy brush. After use, replace the protective cap over the brush and screw the cap back on. Do not mix with bentonite grease or sodium grease! Read the technical and safety specifications. NLGI grade 1-2.