


FAST WRAPPER

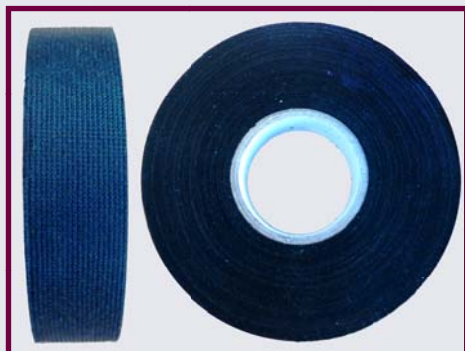

- Easily torn to size.
- Easy to apply.
- Good temperature resistance.
- Does not come loose.
- Ideal width.
- Removable at any time.

Applications

FAST WRAPPER is used for wrapping all kinds of cables.

The excellent temperature resistance and multiple winding capacity provide long-term added protection. Ideal against chafing and contact noise.

Art.Nr.

B100150

Product

Fast Wrapper

Packaging

25 mm x 25 M

TECHNICAL SPECS

Standard width:	25 mm
Total thickness:	0,30 ± 0,2 mm
Adhesion:	4,2N
Tensile strength:	40N
Settlement power:	7,5N
Elongation at break:	18%
Temperature range:	-40 °C to +110 °C
Material:	Polyethyleentereftalaat
Bonding:	Acrylic glue

Instructions for use

Apply to a clean and grease-free surface. Unwind a small piece of FAST WRAPPER and apply to the object. Wind the wrapper around the object as needed and cut or tear at the desired length. When working on flat surfaces, degrease with MTCLEANER first, then apply to the appropriate length and press firmly.

Storage and Shelving

When stored in a well-ventilated area at a temperature between 10 °C and 30 °C, FAST WRAPPER will last at least 12 months.

The information and images are as accurate as possible. Users should ensure that their product is suitable for the chosen application. Multitask Industries does not guarantee the accuracy or completeness of the information. Please refer to our Terms and Conditions. Multitask Industries shall under no circumstances be liable for any indirect, incidental or consequential damage arising from the sale, resale, use or misuse of the product.