


SUPERDRILL

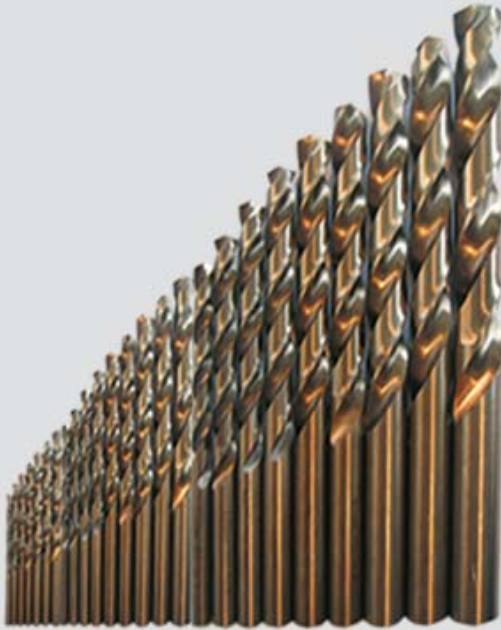

- 8 % Cobalt H.S.S. twist drill.
- Minimized risk of breakage.
- Cylindrical shaft with split point (135°).
- Self-centering, no center punch required.
- No pre-drilling required.
- Long service life.
- Better chip removal.
- For optimum use apply cutting liquid for cooling and lubrication.

Applications:

- Suitable for deep hole drilling.
- Suitable for tough and hard materials, including stainless steel, hardened steel, aluminium,...

SUPERDRILL

TECHNICAL SPECS

Diameter mm	Overall length mm	Effective lengte mm	Art. No.
1	34	12	Y100001
1.5	40	18	Y100002
2	49	24	Y100003
2.5	58	30	Y100004
3	62	33	Y100005
3.2	66	36	Y100052
3.5	70	39	Y100006
4	75	43	Y100007
4.2	70	39	Y100062
4.5	81	47	Y100008
4.8	85	49	Y100063
5	86	52	Y100009
5.5	93	57	Y100010
6	93	57	Y100011
6.5	101	63	Y100012
7	109	69	Y100013
7.5	109	69	Y100014
8	117	75	Y100015
8.5	117	75	Y100016
9	125	81	Y100017
9.5	125	81	Y100018
10	133	87	Y100019
10.5	133	87	Y100020
11	142	94	Y100021
11.5	142	94	Y100022
12	151	101	Y100023
12.5	151	101	Y100024
13	151	101	Y100025